

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 September 2005 (01.09.2005)

PCT

(10) International Publication Number
WO 2005/080120 A1

(51) International Patent Classification⁷: **B60K 35/00**,
G08G 1/09, 1/16

Takeshi. MIAKE, Aki. TAKAHASHI, Toshiya. ITOH,
Megumi. OKUDA, Mitsukazu. DOI, Takeshi.

(21) International Application Number:
PCT/JP2005/002685

(74) Agent: **HARAKENZO WORLD PATENT & TRADE-
MARK**; Daiwa Minamimorimachi Building, 2-6, Tenjin-
bashi 2-chome Kita, Kita-ku, Osaka-shi, Osaka 5300041
(JP).

(22) International Filing Date: 15 February 2005 (15.02.2005)

(25) Filing Language: English

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(26) Publication Language: English

(30) Priority Data:
2004-045407 20 February 2004 (20.02.2004) JP

(71) Applicant (*for all designated States except US*): **SHARP
KABUSHIKI KAISHA** [JP/JP]; 22-22, Nagaike-cho,
Abeno-ku, Osaka-shi, Osaka 5458522 (JP).


(72) Inventors; and

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,

(75) Inventors/Applicants (*for US only*): **YAMAMOTO,**

[Continued on next page]

(54) Title: CONDITION DETECTION AND DISPLAY SYSTEM, CONDITION DETECTION AND DISPLAY METHOD, CON-
TROL PROGRAM FOR CONDITION DETECTION AND DISPLAY SYSTEM, AND STORAGE MEDIUM STORING THE
CONTROL PROGRAM

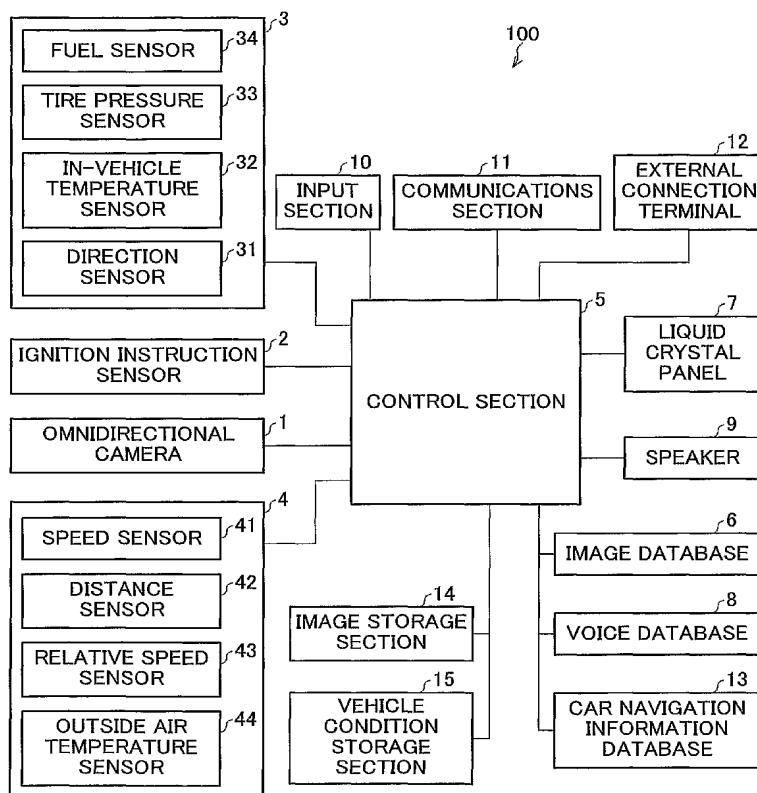

(57) Abstract: In a condition detection and display system (100), an omnidirectional camera (1), internal condition sensors (3), external condition sensors (4), and others detect a condition of a vehicle and surroundings around the vehicle, image data which is a detection result obtained by the aforesaid members and contains an image of the vehicle is selected from an image database (6), and the selected image data is displayed on a liquid crystal panel (7) at a position close to a display of a speedometer.

WO 2005/080120 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.